Electrolux PROFESSIONAL

SkyLine Premium
Electric Combi Oven 10GN1/1

ITEM #

MODEL #

NAME #

SIS #

AIA #



217812 (ECOE101B2C0)	SkyLine Premium Combi Boiler Oven with digital control, 10x1/1GN, electric, programmable, automatic cleaning
217822 (ECOE101B2A0)	SkyLine Premium Combi Boiler Oven with digital control, 10x1/1GN, electric, programmable, automatic cleaning

Short Form Specification

Item No.

Combi oven with digital interface with guided selection.
- Built-in steam generator with real humidity control based upon Lambda Sensor.
- OptiFlow air distribution system to achieve maximum performance with 5 fan speed levels.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Cooking modes: Programs (a maximum of 100 recipes can be stored); Manual (steam, combi and convection cycles); EcoDelta cooking cycle; Regeneration cycle.
- Automatic backup mode to avoid downtime.
- USB port to download HACCP data, programs and settings. Connectivity ready.
- Single sensor core temperature probe.
- Double-glass door with LED lights.
- Stainless steel construction throughout.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

Main Features

- Digital interface with LED backlight buttons with guided selection.
- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C - 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C - 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C - 99 °C): ideal for sous-vide, re-thermalization and delicate cooking.
  Steam cycle (100 °C): seafood and vegetables.
  High temperature steam (25 °C - 130 °C).
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- OptiFlow air distribution system to achieve maximum performance in cooking eveness and temperature control thanks to a special design of the cooking chamber combined with high precision variable speed fan and venting valve.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- Reduced power function for customized slow cooking cycles.
- SkyClean: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- 3 different chemical options available: solid (phosphate-free), liquid (requires optional accessory), enzymatic.
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- USB port to download HACCP data, share cooking programs and configurations.
  USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Capacity: 10 GN 1/1 trays.

APPROVAL:

Electrolux PROFESSIONAL
SkyLine Premium
Electric Combi Oven 10GN1/1

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory – contact the Company for more details).

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2021.08.06

Electrolux PROFESSIONAL

SkyLine Premium
Electric Combi Oven 10GN1/1

Construction

- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler (Registered Design at EPO).
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

Optional Accessories

• Water softener with cartridge and flow meter for 6 & 10 GN 1/1 ovens (low-medium steam usage - less than 2hrs per day full steam)	PNC 920002	❑
• Water softener with cartridge and flow meter (high steam usage)	PNC 920003	❑
• Water softener with salt for ovens with automatic regeneration of resin	PNC 921305	❑
• Resin sanitizer for water softener (921305)	PNC 921306	❑
• Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one)	PNC 922003	❑
• Pair of AISI 304 stainless steel grids, GN 1/1	PNC 922017	❑
• Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922036	❑
• AISI 304 stainless steel grid, GN 1/1	PNC 922062	❑
• Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2	PNC 922086	❑
• External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	❑
• Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm	PNC 922189	❑
• Baking tray with 4 edges in perforated aluminum, 400x600x20mm	PNC 922190	❑
• Baking tray with 4 edges in aluminum, 400x600x20mm	PNC 922191	❑
• Pair of frying baskets	PNC 922239	❑
• AISI 304 stainless steel bakery/pastry grid 400x600mm	PNC 922264	❑
• Double-step door opening kit	PNC 922265	❑
• Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1	PNC 922266	❑
• Grease collection tray, GN 1/1, H=100 mm	PNC 922321	❑
• Kit universal skewer rack and 4 long skewers for Lenghtwise ovens	PNC 922324	❑
• Universal skewer rack	PNC 922326	❑
• 4 long skewers	PNC 922327	❑
• Water nanofilter for 6 & 10 GN 1/1 ovens	PNC 922342	❑
• External reverse osmosis filter for 6 & 10 GN 1/1 ovens	PNC 922343	❑
• Multipurpose hook	PNC 922348	❑
• 4 flanged feet for 6 & 10 GN , 2", 100-130mm	PNC 922351	❑
• Grid for whole duck (8 per grid - 1,8kg each), GN 1/1	PNC 922362	❑
• Thermal cover for 10 GN 1/1 oven and blast chiller freezer	PNC 922364	❑
• Tray support for 6 & 10 GN 1/1 disassembled open base	PNC 922382	❑
• Wall mounted detergent tank holder	PNC 922386	❑
• USB single point probe	PNC 922390	❑
• Tray rack with wheels 10 GN 1/1, 65mm pitch	PNC 922601	❑
• Tray rack with wheels, 8 GN 1/1, 80mm pitch	PNC 922602	❑
• Bakery/pastry tray rack with wheels holding 400x600mm grids for 10 GN 1/1 oven and blast chiller freezer, 80mm pitch (8 runners)	PNC 922608	❑
• Slide-in rack with handle for 6 & 10 GN 1/1 oven	PNC 922610	❑
• Open base with tray support for 6 & 10 GN 1/1 oven	PNC 922612	❑
• Cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 922614	❑
• Hot cupboard base with tray support for 6 & 10 GN 1/1 oven holding GN 1/1 or400x600mm	PNC 922615	❑
• External connection kit for liquid detergent and rinse aid	PNC 922618	❑
• Grease collection kit for GN 1/1-2/1 cupboard base (trolley with 2 tanks, open/close device for drain)	PNC 922619	❑
• Stacking kit for 6+6 GN 1/1 ovens on electric 6+10 GN 1/1 GN ovens	PNC 922620	❑
• Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller freezer	PNC 922626	❑
• Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens	PNC 922630	❑
• Stainless steel drain kit for 6 & 10 GN oven, dia=50mm	PNC 922636	❑
• Plastic drain kit for 6 &10 GN oven, dia=50mm	PNC 922637	❑
• Trolley with 2 tanks for grease collection	PNC 922638	❑
• Grease collection kit for GN 1/1-2/1 open base (2 tanks, open/close device for drain)	PNC 922639	❑
• Wall support for 10 GN 1/1 oven	PNC 922645	❑
• Banquet rack with wheels holding 30 plates for 10 GN 1/1 oven and blast chiller freezer, 65mm pitch	PNC 922648	❑
• Banquet rack with wheels 23 plates for 10 GN 1/1 oven and blast chiller freezer, 85mm pitch	PNC 922649	❑
• Dehydration tray, GN 1/1, H=20mm	PNC 922651	❑
• Flat dehydration tray, GN 1/1	PNC 922652	❑
• Open base for 6 & 10 GN 1/1 oven, disassembled - NO accessory can be fitted with the exception of 922382	PNC 922653	❑
• Bakery/pastry rack kit for 10 GN 1/1 oven with 8 racks 400x600mm and 80mm pitch	PNC 922656	❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2021.08.06


- Stacking kit for gas 6 & 10 GN 1/1 oven placed on 7kg and 15kg crosswise blast chiller freezer — PNC 922657 ❑
- Heat shield for stacked ovens 6 GN 1/1 on 10 GN 1/1 — PNC 922661 ❑
- Heat shield for 10 GN 1/1 oven — PNC 922663 ❑
- Fixed tray rack for 10 GN 1/1 and 400x600mm grids — PNC 922685 ❑
- Kit to fix oven to the wall — PNC 922687 ❑
- Tray support for 6 & 10 GN 1/1 oven base — PNC 922690 ❑
- 4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm — PNC 922693 ❑
- Reinforced tray rack with wheels, lowest support dedicated to a grease collection tray for 10 GN 1/1 oven, 64mm pitch — PNC 922694 ❑
- Connectivity WiFi board (NIU-HACL) for SkyLine/Magistar and Rapido — PNC 922695 ❑
- Detergent tank holder for open base — PNC 922699 ❑
- Bakery/pastry runners 400x600mm for 6 & 10 GN 1/1 oven base — PNC 922702 ❑
- Wheels for stacked ovens — PNC 922704 ❑
- Spit for lamb or suckling pig (up to 12kg) for GN 1/1 ovens — PNC 922709 ❑
- Mesh grilling grid, GN 1/1 — PNC 922713 ❑
- Probe holder for liquids — PNC 922714 ❑
- Odour reduction hood with fan for 6 & 10 GN 1/1 electric ovens — PNC 922718 ❑
- Odour reduction hood with fan for 6+6 or 6+10 GN 1/1 electric ovens — PNC 922722 ❑
- Condensation hood with fan for 6 & 10 GN 1/1 electric oven — PNC 922723 ❑
- Condensation hood with fan for stacking 6+6 or 6+10 GN 1/1 electric ovens — PNC 922727 ❑
- Exhaust hood with fan for 6 & 10 GN 1/1 ovens — PNC 922728 ❑
- Exhaust hood with fan for stacking 6+6 or 6+10 GN 1/1 ovens — PNC 922732 ❑
- Exhaust hood without fan for 6&10 1/1GN ovens — PNC 922733 ❑
- Exhaust hood without fan for stacking 6+6 or 6+10 GN 1/1 ovens — PNC 922737 ❑
- Fixed tray rack, 8 GN 1/1, 85mm pitch — PNC 922741 ❑
- Fixed tray rack, 8 GN 2/1, 85mm pitch — PNC 922742 ❑
- 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm — PNC 922745 ❑
- Tray for traditional static cooking, H=100mm — PNC 922746 ❑
- Double-face griddle, one side ribbed and one side smooth, 400x600mm — PNC 922747 ❑
- Trolley for grease collection kit — PNC 922752 ❑
- Water inlet pressure reducer — PNC 922773 ❑
- Kit for installation of electric power peak management system for 6 & 10 GN Oven — PNC 922774 ❑
- Extension for condensation tube, 37cm — PNC 922776 ❑
- Non-stick universal pan, GN 1/1, H=20mm — PNC 925000 ❑
- Non-stick universal pan, GN 1/ 1, H=40mm — PNC 925001 ❑
- Non-stick universal pan, GN 1/1, H=60mm — PNC 925002 ❑
- Double-face griddle, one side ribbed and one side smooth, GN 1/1 — PNC 925003 ❑
- Aluminum grill, GN 1/1 — PNC 925004 ❑
- Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 — PNC 925005 ❑
- Flat baking tray with 2 edges, GN 1/1 — PNC 925006 ❑
- Baking tray for 4 baguettes, GN 1/1 — PNC 925007 ❑
- Potato baker for 28 potatoes, GN 1/1 — PNC 925008 ❑
- Non-stick universal pan, GN 1/2, H=20mm — PNC 925009 ❑
- Non-stick universal pan, GN 1/2, H=40mm — PNC 925010 ❑
- Non-stick universal pan, GN 1/2, H=60mm — PNC 925011 ❑
- Compatibility kit for installation on previous base GN 1/1 — PNC 930217 ❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2021.08.06

SkyLine Premium
Electric Combi Oven 10GN1/1

Front

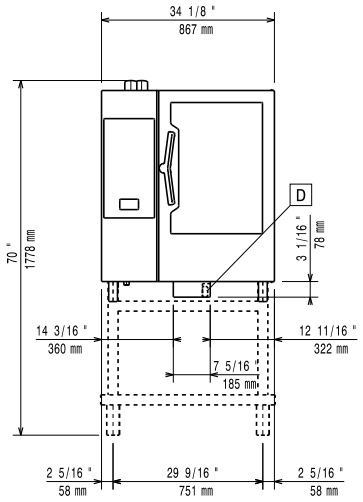


Side

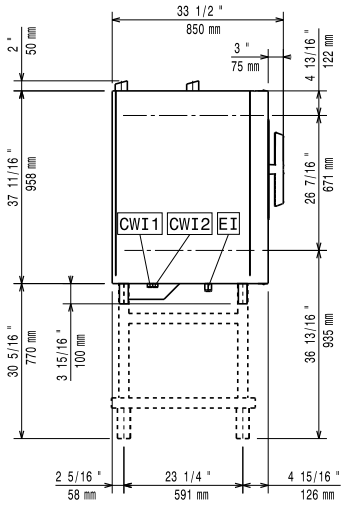

CWI1 = **Cold Water inlet 1 (cleaning)**
CWI2 = **Cold Water Inlet 2 (steam generator)**
D = **Drain**
DO = **Overflow drain pipe**
EI = **Electrical inlet (power)**

Top

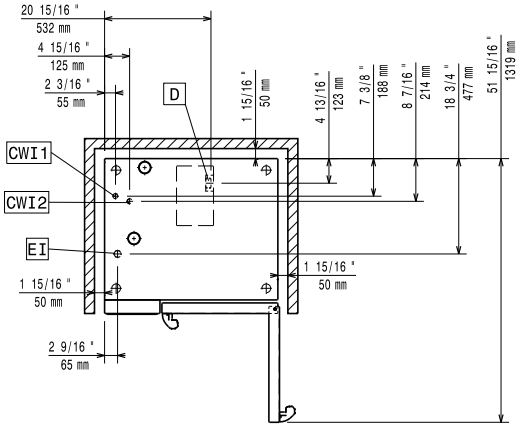

Electric

Supply voltage:	
217812 (ECOE101B2C0)	220-240 V/3 ph/50-60 Hz
217822 (ECOE101B2A0)	380-415 V/3N ph/50-60 Hz
Electrical power, default:	19 kW
Electrical power max.:	20.3 kW
Circuit breaker required	

Gas

Natural gas:

Default power corresponds to factory test conditions.
When supply voltage is declared as a range the test is performed at the average value. According to the country, the installed power may vary within the range.

Water:

Water inlet connections "CWI1-CWI2":	3/4"
Pressure, bar min/max:	1-6 bar
Drain "D":	50mm
Max inlet water supply temperature:	30 °C
Chlorides:	<17 ppm
Conductivity:	>285 µS/cm

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance:	Clearance: 5 cm rear and right hand sides.
Suggested clearance for service access:	50 cm left hand side.

Capacity:

Trays type:	10 - 1/1 Gastronorm
Max load capacity:	50 kg

Key Information:

Door hinges:	
External dimensions, Width:	867 mm
External dimensions, Height:	1058 mm
External dimensions, Depth:	775 mm
Weight:	145 kg
Net weight:	145 kg
Shipping weight:	
217812 (ECOE101B2C0)	160 kg
217822 (ECOE101B2A0)	155 kg
Shipping volume:	
217812 (ECOE101B2C0)	1.04 m³
217822 (ECOE101B2A0)	1.06 m³

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2021.08.06