
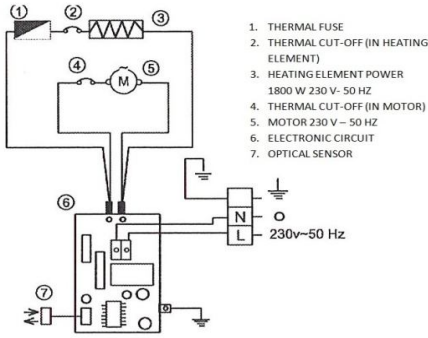




# TECHNICAL DATA SHEET

NAME	REFERENCE
OPTICAL SENSOR OPERATED HAND DRYER SATIN STAINLESS STEEL	AA16500
DESCRIPTION	
HIGH QUALITY AND PERFORMANCE STANDARD HAND DRYER  SATIN STAINLESS STEEL COVER OF HIGH QUALITY  OPTICAL SENSOR OPERATED : ACTIVATES WHEN APPROCHING HANDS  SECURITY SYSTEM WITH TIMER  EXCELLENT PRICE-PERFORMANCE RATIO	
ELECTRICAL SCHEME	
 <p>1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. ELECTRONIC CIRCUIT 7. OPTICAL SENSOR</p>	<b>EAN CODE</b>
	8427950304460

CHARACTERISTICS				
<b>NET</b> (Without packaging)	<b>DIMENSIONS (mm)</b>	HEIGHT: 318	WIDTH: 228	DEPTH: 145
	<b>WEIGHT (Kg)</b>	3,585		
<b>GROSS</b> (with packaging)	<b>DIMENSIONS (mm)</b>	HEIGHT: 380	WIDTH: 290	DEPTH: 225
	<b>WEIGHT (Kg)</b>	4,175		
<b>MATERIALS</b>	COVER: STAINLESS STEEL AISI 304 INTERNAL COMPONENTS: ABS AND POLYCARBONATE "VO"			
<b>COLOUR / FINISH</b>	COVER: SATIN INOX AIR OUTLET GRILLE : BLACK			
<b>ELECTRICAL FEATURES</b>	VOLTAGE: 230V. AC FREQUENCY: 50 Hz. CONSUMPTION: 8,5 Amp. MOTOR POWER: 140 W. HEATING ELEMENT POWER: 1820 W. TOTAL POWER: 1960 W. MOTOR RPM: 2800		AIR SPEED: 68 Km/HOUR EFFECTIVE AIR FLOW: 250 m <sup>3</sup> /HOUR SOUND PRESSURE: 58 Db. AIR TEMPERATURE: 55 °C (at a distance of 10 cm) ELECTRICAL INSULATION: CLASS I CERTIFICATIONS: CE, TÜV AND GS PROTECTION RATIO: IPX1	
<b>FIXING</b>	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS- PROVIDED			
<b>PACKAGING</b>	SINGLE UNIT PACKAGING.		Approved by: Quality Control Dept  DATE: 12/05/2015	