
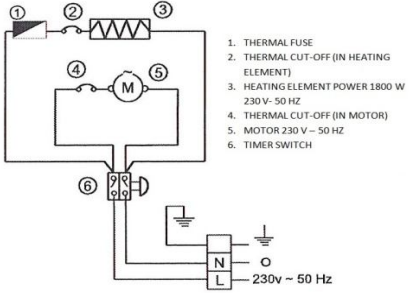




TECHNICAL DATA SHEET

NAME	REFERENCE
PUSH BUTTON OPERATED HAND DRYER SATIN STAINLESS STEEL	AA15500
DESCRIPTION	
HIGH QUALITY AND PERFORMANCE STANDARD HAND DRYER EXCELLENT PRICE-PERFORMANCE RATIO MANUAL PUSH BUTTON AND AUTOMATIC STOP SECURITY SYSTEM WITH TIMER HIGH QUALITY SATIN STAINLESS STEEL COVER	
ELECTRICAL SCHEME	 <p> 1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230V- 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V – 50 HZ 6. TIMER SWITCH </p>
	EAN CODE
	8427950304392

CHARACTERISTICS				
NET (without packaging)	DIMENSIONS (mm)	HEIGHT: 318	WIDTH: 226	DEPTH: 150
	WEIGHT (Kg)	3,615		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 380	WIDTH: 290	DEPTH: 225
	WEIGHT (Kg)	4,165		
MATERIALS	COVER: STAINLESS STEEL AISI 304 INTERNAL COMPONENTS: ABS AND POLYCARBONATE "V0" PUSH BUTTON: ZAMAK			
COLOUR / FINISH	COVER: SATIN INOX PUSH BUTTON : CHROME PLATING FINISH AIR OUTLET GRILLE: BLACK			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC		AIR SPEED: 68 Km/HOUR	
	FREQUENCY: 50 Hz.		EFFECTIVE AIR FLOW: 250 m ³ /HOUR	
CONSUMPTION: 8,5 Amp.		SOUND PRESSURE: 58 Db.		
MOTOR POWER: 140 W.		AIR TEMPERATURE: 55 °C (at a distance of 10 cm)		
HEATING ELEMENT POWER: 1820 W.		ELECTRICAL INSULATION: CLASS I		
TOTAL POWER: 1960 W.		CERTIFICATIONS: CE, TÜV AND GS		
MOTOR RPM: 2800		PROTECTION RATIO: IPX1		
FIXING SYSTEM	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - INCLUDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by: Quality Control Dept	
			DATE: 12/05/2015	