
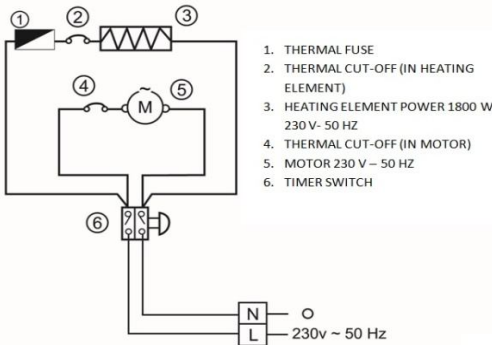




TECHNICAL DATA SHEET

NAME	REFERENCE	
PUSH BUTTON VITRIFIED HAND DRYER IBERO	AA93000	
DESCRIPTION		
<p>HIGH QUALITY AND PERFORMANCE TRADITIONAL HAND DRYER</p> <p>DOUBLE TECHNICAL INSULATION</p> <p>OPTICAL SENSOR OPERATED : AUTOMATIC STAR AND STOP</p> <p>CLASS II: NO GROUNDING WIRE REQUIRED, AT 0,6 mts FROM WATER POINT</p> <p>MADE IN HIGH QUALITY VITRIFIED STEEL</p>		
ELECTRICAL SCHEME		
 <ol style="list-style-type: none"> 1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. TIMER SWITCH 	<th>EAN CODE</th>	EAN CODE
	8427950323140	

CHARACTERITICS				
NET (without packaging)	DIMENSIONS (mm)	HEIGHT: 220	WIDTH: 280	DEPTH: 210
	WEIGHT (Kg)	4,425		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 285	WIDTH: 345	DEPTH: 295
	WEIGHT (Kg)	5,125		
MATERIALS	STAMPED VITRIFIED STEEL COVER INTERNAL COMPONENTS IN POLYCARBONATE "VO" PUSH BUTTON AND NOZZLE MADE IN CHROME ABS			
COLOUR / FINISH	WHITE STAMPED VITRIFIED STEEL COVER CHROME PUSH BUTTON AND NOZZLE			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC		AIRSPEED: 121 Km/HOUR	
	FREQUENCY: 50 Hz.		EFFICIENT AIRFLOW: 300 m³/HOUR	
CONSUMPTION: 8,8 Amp.		SOUND PRESSURE: 77,5 Db.		
MOTOR POWER: 200 W.		AIR TEMPERATURE: 54,1 °C (At a distance of 10 cm.)		
HEATING ELEMENT POWER : 1800 W.		ELECTRICAL INSULATION: CLASS II		
TOTAL POWER: 2000 W.		CERTIFICATIONS: TÜV, GS, UL AND CE		
MOTOR RPM: 4250		PROTECTION RATIO: IP23		
TYPE OF MOTOR : BRUSHED				
FIXING	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - PROVIDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by: Quality Control Dept	
			DATE: 12/05/2015	